






SPESIFIKASI LAMPU PJU-TS 70 WATT LED OSRAM


1. LAMPU LED OSRAM 70 WATT HIGH LUMENS	2. Spesification LED OSRAM 70 Watt
	<ul style="list-style-type: none"> . Dual power source : Ac / Dc 36V . Protection : IP 66 Design Outdoor . High efficacy : Up to 120lm/W . Lumens : 8400lm . Long lifetime : 50,000 hours . Warranty : 2 ~ 3 years . Material : Aluminum . Kelvin color / CCT : 4000K ~ 5600K . Beam Angle : 150 x 60

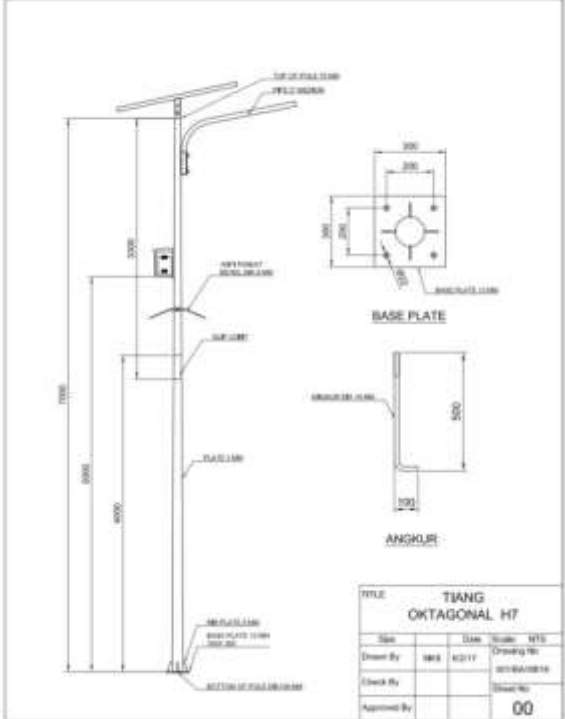
	 <p style="font-size: small; margin-top: 20px;"> LEDENVO™ LED Street Light Photometrics Light Distribution Curve 100° x 60° 100° x 70° </p>
---	--

1. Solar panel / PV Module	2. Spesification 250 WP
	<ul style="list-style-type: none"> . Module type : Poly Crystalline . Power Output : 250 watt . Voltage at Pmax, Impp : 32 Volt . Current at Pmax ,Impp : 7.2 Amper . Open circuit current Voc : 36 Volt . Short circuit current Isc : 8.2 Amper . Warranty : 15 years

1. Controller Smart SRNE 12/24 Volt {15A}	2. Spesification SRNE 15A
	<ul style="list-style-type: none"> . Model type : Smart SRNE . Power Input : 12/24 volt . Voltage input PV : 15 ~ 55 Volt . Current Max : 5 ~ 15 Amper . Volttage Load LED : 15 ~ 60 Volt . Protection : IP 68 . Warranty : 1 years

1. Battery Vrla / Lead acid	2. Spesification 70Ah x 2 unit
	<ul style="list-style-type: none"> . Model type : Vrl – Lead Acid . Power Amper : 140 Ah . Voltage : 24.6 ~ 26.8 Volt . Lifetime : 3 years . Warranty : 1 years

1. Box Battery	2. Spesification
	<ul style="list-style-type: none"> . Model type : Powder Coating . Capacity Box Battery : 140 Ah . Lifetime : 2 years . Warranty : 1 years

1. Light poles & accessories	2. Spesification
	<ul style="list-style-type: none"> . Model type : Octagonal Galvanis . Capacity Box Battery : 140 Ah . Standart pole height : 8 ~ 9 M . Lifetime : 20 years . Warranty : 10 years