






# SPESIFIKASI LAMPU PJU-TS 80 WATT LED OSRAM


1. LAMPU LED OSRAM 80 WATT HIGH LUMENS	2. Spesification LED OSRAM 80 Watt
	<ul style="list-style-type: none"> <li>. Dual power source : Ac / Dc 36V</li> <li>. Protection : IP 66 Design Outdoor</li> <li>. High efficacy : Up to 120lm/W</li> <li>. Lumens : 9600lm</li> <li>. Long lifetime : 50,000 hours</li> <li>. Warranty : 2 ~ 3 years</li> <li>. Material : Aluminum</li> <li>. Kelvin color / CCT : 4000K ~ 5600K</li> <li>. Beam Angle : 150 x 60</li> </ul>

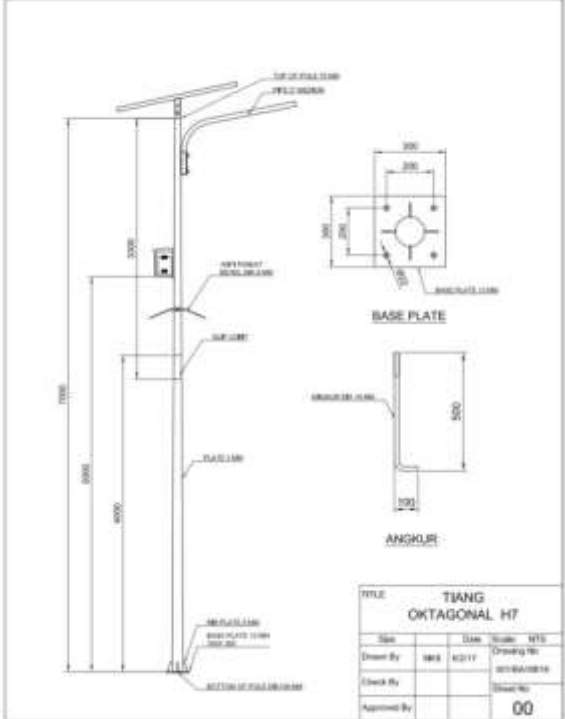
	<div style="text-align: center;"> <p><b>LEDENVO™ LED Street Light</b></p> <p>Photometrics Light Distribution Curve</p> <p>100° = 60°      100° = 70°</p>  </div> <p style="font-size: small; margin-top: 20px;"> <small>                     LEDENVO™ LED Street Light                      Photometrics                      Light Distribution Curve                      100° = 60°      100° = 70°                      © 2018 LEDENVO™ LED Street Light                      All rights reserved.                 </small> </p>
---	--

1. Solar panel / PV Module	2. Spesification 250 WP
	<ul style="list-style-type: none"> <li>. Module type : Poly Crystalline</li> <li>. Power Output : 250 watt</li> <li>. Voltage at Pmax, Impp : 32 Volt</li> <li>. Current at Pmax ,Impp : 7.2 Amper</li> <li>. Open circuit current Voc : 36 Volt</li> <li>. Short circuit current Isc : 8.2 Amper</li> <li>. Warranty : 15 years</li> </ul>

1. Controller Smart SRNE 12/24 Volt {15A}	2. Spesification SRNE 15A
	<ul style="list-style-type: none"> <li>. Model type : Smart SRNE</li> <li>. Power Input : 12/24 volt</li> <li>. Voltage input PV : 15 ~ 55 Volt</li> <li>. Current Max : 5 ~ 15 Amper</li> <li>. Volttage Load LED : 15 ~ 60 Volt</li> <li>. Protection : IP 68</li> <li>. Warranty : 1 years</li> </ul>

1. Battery Vrla / Lead acid	2. Spesification 100Ah x 2 unit
	<ul style="list-style-type: none"> <li>. Model type : Vrl – Lead Acid</li> <li>. Power Amper : 200 Ah</li> <li>. Voltage : 24.6 ~ 26.8 Volt</li> <li>. Lifetime : 3 years</li> <li>. Warranty : 1 years</li> </ul>

1. Box Battery	2. Spesification
	<ul style="list-style-type: none"> <li>. Model type : Powder Coating</li> <li>. Capacity Box Battery : 200 Ah</li> <li>. Lifetime : 2 years</li> <li>. Warranty : 1 years</li> </ul>

1. Light poles & accessories	2. Spesification
	<ul style="list-style-type: none"> <li>. Model type : Octagonal Galvanis</li> <li>. Capacity Box Battery : 200 Ah</li> <li>. Standart pole height : 8 ~ 9 M</li> <li>. Lifetime : 20 years</li> <li>. Warranty : 10 years</li> </ul>